

# POOL2-I

Swimming Pool



The pump includes a variable speed drive for greater comfort and minimized energy costs, in addition to the following features: 5 configurable daily filtration cycles, filter cleaning program, pool lighting control, function for water surface cleaning, 2 outputs for activating saline chlorinator and pump status, protection for over voltage, against dry running and pipe breakage.

Pre-filter sieve


Self-vented wall support

Construction features	
<b>Pump body, seal housing, diffuser</b>	polypropylene
<b>Motor bracket</b>	aluminum
<b>Impeller</b>	Noryl®
<b>Mechanical seal</b>	ceramic-graphite-AISI 316
<b>Motor shaft</b>	stainless steel AISI 316
<b>Liquid temperature</b>	max 40 °C
<b>Pre-filter cover</b>	polycarbonate
<b>Opening key for pre-filter lid</b>	polypropylene

Motor	
<b>2 Poles induction motor</b>	1~ 230V-50Hz
<b>Insulation class</b>	F
<b>Protection degree</b>	IP55
<b>Integral system for pool control</b>	with variable speed drive included



# POOL2EASY

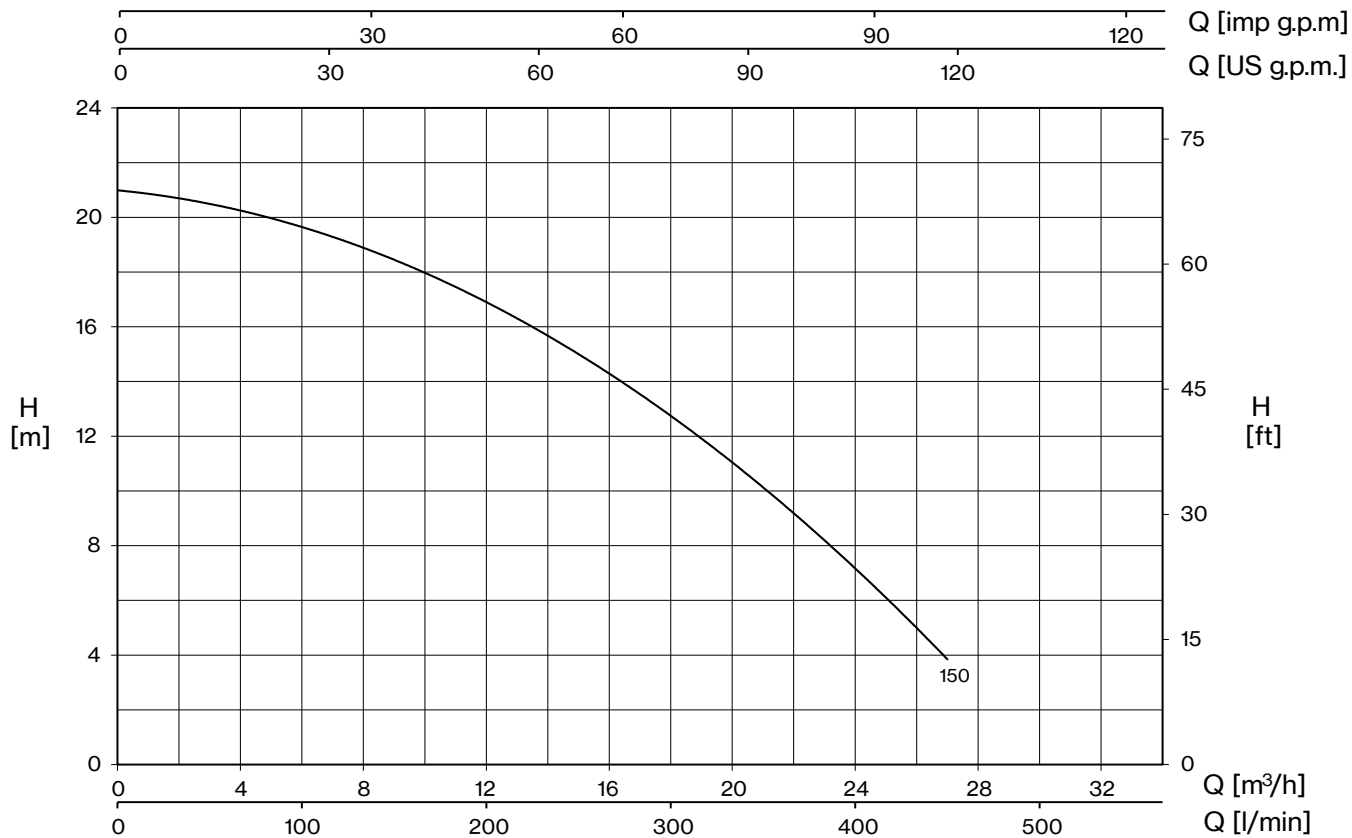

TYPE	P2		μF	AMPERE	H (m)								DNA	DNM
				1~	4	6	8	10	12	14	16	18		
	HP	kW		230 V	Q (m³/h)									
<b>POOL2-I 150M</b>	1,5	1,1	30	7,3	27	25	23	21	19	17	13	10	2" Ø 63 PVC	